




THO. Tornillo hormigón PVC TX30



> MATERIALES DE APLICACIÓN

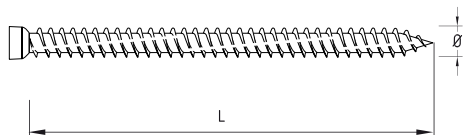

Referencia	Díámetro Ø mm	Longitud L mm	Espesor a fijar Tfix mm	Taladro mm	Huella	Par máx. Tins Nm
TH075072	7,5	72	32	6	TX30	12
TH075092	7,5	92	52	6	TX30	12
TH075112	7,5	112	72	6	TX30	12
TH075132	7,5	132	92	6	TX30	12
TH075152	7,5	152	112	6	TX30	12
TH075182	7,5	182	142	6	TX30	12
TH075212	7,5	212	172	6	TX30	12

> CARACTERÍSTICAS DEL PRODUCTO

Material	Acero cementado cincado ISO 4042 A2J
Cabeza	avellanada con huella hexalobular TX30

> CARGAS ADMISIBLES

Carga recomendada	Nrk	kN	1,00
-------------------	-----	----	------

THO. Tapón tornillo hormigón PVC TX30



Referencia	Tapón Ø	RAL
THOTP9010	15,4	9010
THOTP8003	15,4	8003